COIN LOCK

Applications

This lock is suitable for locker doors.

For the door to be locked, the user must deposit a coin, which is held in the machine while the locker is in use. When unlocked, the coin is released into a coin return tray, or a lockable coin box, where coin retention is required.

2764512A

Specifications

- Changeable cylinder
- Coin size - customer-selectable - ø20 mm Min. ø30 mm Max.
- Maximum coin thickness 3.2 mm
- Chrome-plated nozzle
- All components non-ferrous

Dimensions/Fixing shown NTS

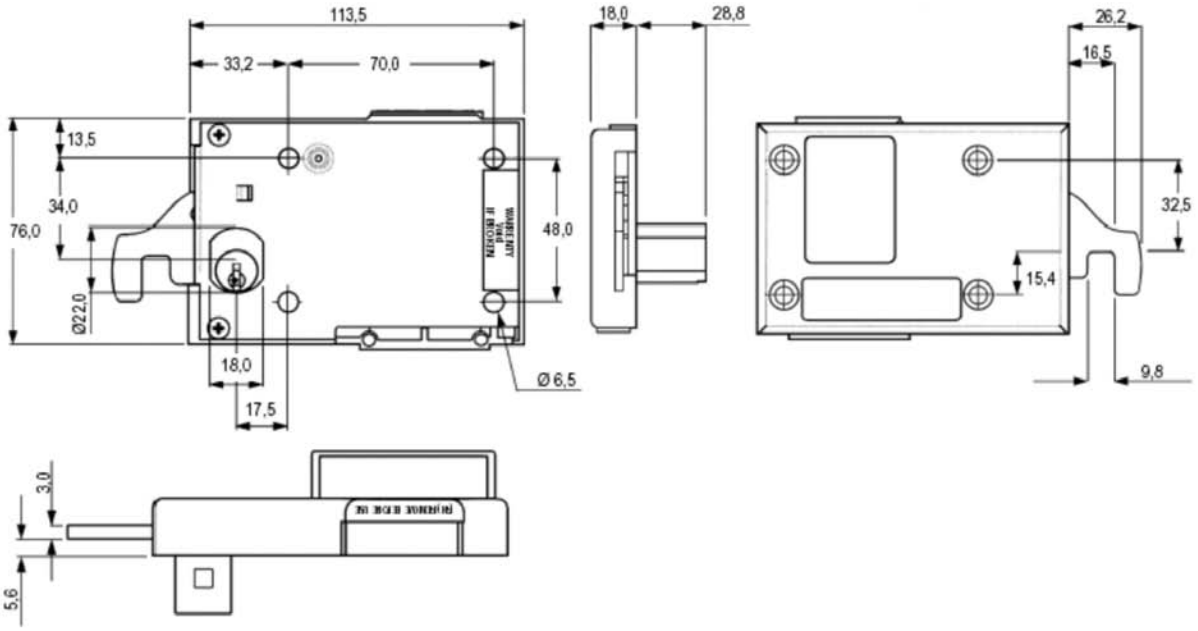

Ordering Details

Measurements shown in mm

2765512A	**RH Lock** (Suits right hand hinged doors)
2764522A	**LH Lock** (Suits left hand hinged doors)